



- Body in polyamide
- Protection class IP65
- NAMUR connection acc. to VDI/VDE 3845
- With or without manual override

bürkert

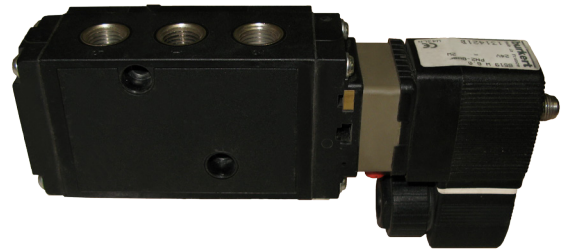


FUNCTION:


5/2-way function

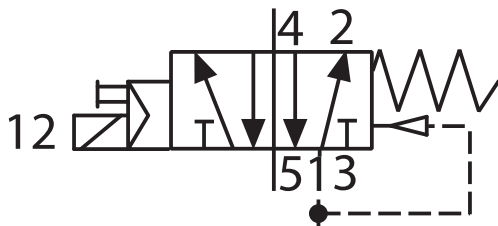

3/2-way function

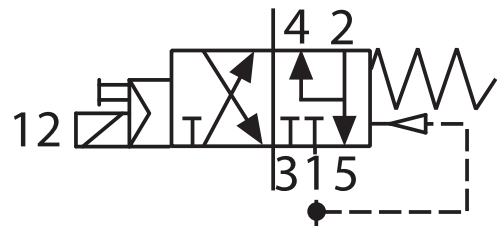

MNAM

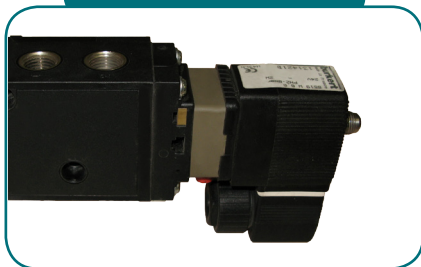

- Voltages: 24V DC, 24V AC, 110V DC, 110V AC, 230V DC and 230V AC

MNAMX



- Voltages: 24V UC, 110V UC and 230V UC
- ATEX II 2G Ex eb mb IIC T5 Gb
- ATEX II 2G Ex mb tb IIIC T95°C Db

MNAMXC







- Voltages: 24V UC, 110V UC and 230V UC
- ATEX II 2G Ex mb IIIC T5 Gb
- ATEX II 2G Ex mb IIIC T95°C Db

MNAMI



- Voltages: 24V DC
- ATEX II Ex ia IIC T6

OPTIONAL CONNECTIONS

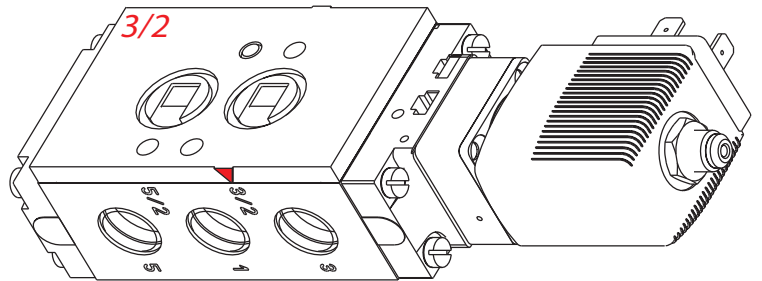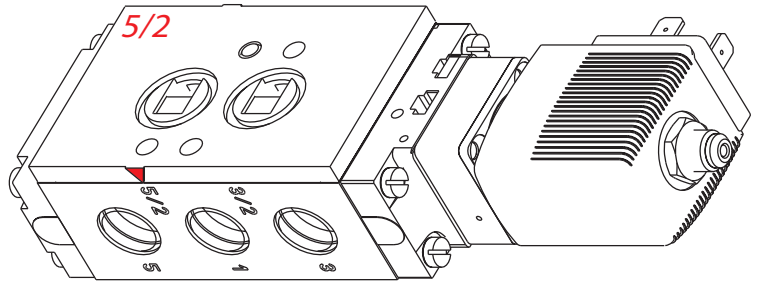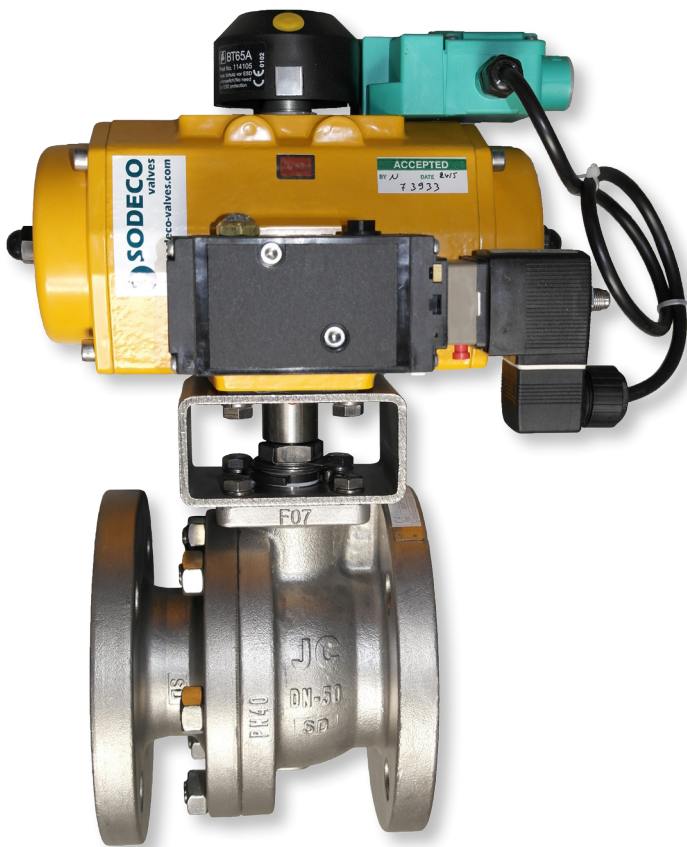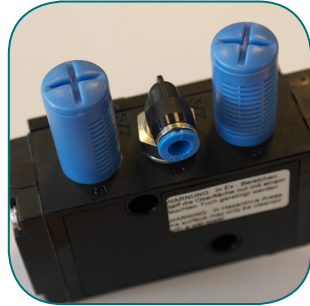

SPEED CONTROL PLATE

BREATHER BLOCK

BLOCK & VENT SOLENOID

